




FAST-FLOAT

GALLEGGIANTI A CHIUSURA RAPIDA INSTANT STOP FLOAT SWITCH

Portata costante fino al completo riempimento del serbatoio.
Riempimento più rapido e minore rumorosità rispetto ai sistemi tradizionali.
Ottimizza i riempimenti e riduce il passaggio di aria (dove presente) dal contatore verso il serbatoio.

*Constant flow rate until the tank is completely filled.
Faster filling and less noise than traditional systems.
Optimizes fillings and reduces the passage of air (where present) from the water meter to the tank.*

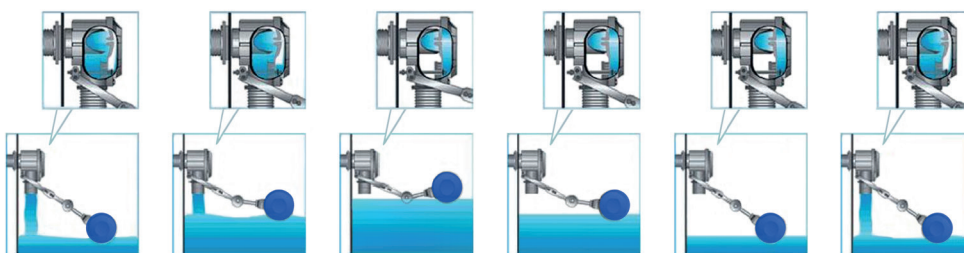

CARATTERISTICHE TECNICHE TECHNICAL FEATURES

Temp. di funzionamento <i>Operating temperature</i>	0°C ÷ + 50°C
Sovrapressione <i>Overpressure</i>	10 bar
Servizio <i>Service</i>	Continuo <i>Continuous</i>
Pressione di servizio <i>Working pressure</i>	0,2-6 bar

Dimensioni <i>Dimensions</i>	240x80x50 mm (mod. 3/8", 1/2") 350x150x70 mm (mod. 3/4" -> 1 1/2")
Peso <i>Weight</i>	350 gr
Contenitore <i>Enclosure</i>	Policarbonato atossico <i>Non-toxic polycarbonate</i>
Viteria <i>Screws</i>	Acciaio Inox <i>Stainless Steel</i>

MODELLO <i>MODEL</i>	CODICE <i>CODE</i>	ATTACCO MASCHIO <i>MALE CONNECTION</i>	CONFEZIONE <i>PACKAGE</i>
FAST-FLOAT	PFGA00301	3/8"	25 pz/pcs
FAST-FLOAT	PFGA00302	1/2"	25 pz/pcs
FAST-FLOAT	PFGA00303	3/4"	25 pz/pcs
FAST-FLOAT	PFGA00304	1"	25 pz/pcs
FAST-FLOAT	PFGA00305	1 1/4"	25 pz/pcs
FAST-FLOAT	PFGA00306	1 1/2"	25 pz/pcs