



Made in Italy

## LOGICPRESS PLUS

### PRESSURE FLOW SWITCH WITH 1"1/4 CONNECTIONS

Can be energized with either 115 Vac or 230 Vac.

Starts and stops the pump depending on opening and closing of the outlets.

It has 1"1/4 male connections to guarantee a higher flow rate.

Stops the pump in case of water shortage and protects it from dry running.

Equipped with automatic restarts in case of failure and anti-jamming function.

No need for an expansion tank, check valve, filter or fittings.

Can be installed on surface and submersible pumps up to 3 HP.





Maintenance free.

### TECHNICAL FEATURES

	LOGICPRESS PLUS	LOGICPRESS PLUS R	LOGICPRESS PLUS 24V
Single-phase mains voltage	115/230 Vac	115/230 Vac	24 Vcc
Acceptable voltage fluctuation	+/- 10%	+/- 10%	+/- 10%
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Current max	16 A	16 A	20 A
Power max at 115V	1,1 kW (1,5 HP)	1,1 kW (1,5 HP)	—
Power max at 230V	2,2 kW (3 HP)	2,2 kW (3 HP)	—
Power max at 24V	—	—	0,37 kW (0,5 HP)
Protection degree	IP 65	IP 65	IP 65
Operating pressure max	12 bar	12 bar	12 bar
Operating temperature max	60 °C	60 °C	60 °C
Minimum flow	~1 l/min	~1 l/min	~1 l/min
Male connections	Gc 1"1/4	Gc 1"1/4	Gc 1"1/4

### CONTROL PANEL

#### SIGNALING OF THE WORKING PHASES AND ANOMALIES

	<b>POWER ON</b> Green LED on	Device energized
	<b>PUMP ON</b> Yellow LED on	Pump running
	<b>FAILURE</b> Red LED blinking	Water shortage
	<b>RESTART</b> Button	Reset after failure


## INSTALLATION AND STARTUP

The device can be installed directly on the pump or between the pump and the first tap.

Make all the electrical connections and energize.

From now on, the device will turn the pump on and off depending on the opening and closing of the tap.

In case of a temporary blackout, the device will automatically rearm once the electricity returns.

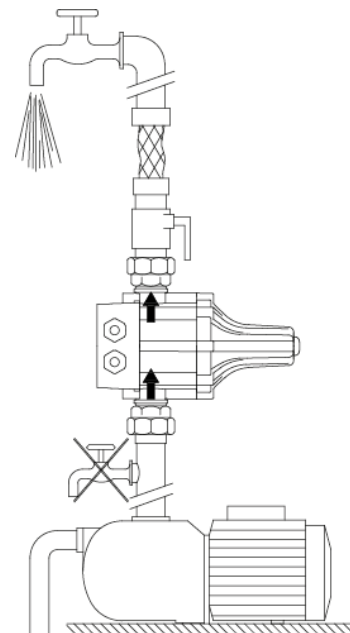

## SELECTION OF THE DEVICE WITH THE CORRECT RESTART VALUE

Refer to the following table to choose the device with the correct restart value suitable to the characteristics of the system. Standard restart value is 1,5 bar. On request, restart values different from the standard are available as indicated in the table.

RESTART PRESSURE	1,2 bar	1,5 bar	2,2 bar	3 bar	4 bar
FLOORS NUMBER	4	5	7	10	13
BUILDING HEIGHT (H)	12 mt	15 mt	22 mt	30 mt	40 mt
MAX PUMP PRESSURE	min 2,5 bar	min 3 bar	min 3,5 bar	min 4,5 bar	min 5,5 bar

## AUTOMATIC RESTARTS

In case of stopping due to a water shortage, the device will automatically make 10 double attempts to rearm over the 24 hours following the failure, each lasting approximately 5 seconds to allow the pump and the system to reload if possible. The user can try to rearm the device at any time by pressing the Restart button.

## ANTI-JAMMING FUNCTION

If for any reason the pump remains idle for 24 consecutive hours, the device will start the pump for about 5 seconds.

## LOGICPRESS *PLUS R*

It differs from the LOGICPRESS PLUS only in the hydraulic part, modified to allow the adjustment of the restart value and for the presence, as standard, of the pressure gauge.

## SETTING THE RESTART VALUE

Set the desired restart value by turning the screw on the back of the unit. Turn clockwise to increase restart pressure value and counterclockwise to decrease restart pressure value (see fig. 1).

For a correct regulation of the restart value, follow the table below.

RESTART PRESSURE	1,5 bar	2 bar	2,5 bar	3 bar
FLOORS NUMBER	5	6	8	10
BUILDING HEIGHT (H)	15 mt	20 mt	25 mt	30 mt
MAX PUMP PRESSURE	min 3 bar	min 3,5 bar	min 4 bar	min 4,5 bar



FIG.1

## LOGICPRESS *PLUS 24V*

24 Vdc version ideal for use on campers, industrial vehicles, boats, photovoltaic systems, etc.

## OPTIONALS

- GasOil version suitable for use with petroleum and other chemicals.
- 12 Vdc version.